

FITTING INSTRUCTIONS

AC1051




-  It is recommended that only a properly qualified person installs the product and carries out maintenance. If you are not qualified and attempt to carry out such work ensure that all safety equipment is used and safety standards are met.
-  **DO NOT** connect any electrical components to the vehicle without preparing the electrical system as per the vehicle manufacturer's instructions. Connecting without preparing the vehicle could lead to component failure, vehicle damage or fire.
-  In some Countries, States or Territories it may not be legal to position the switches inside a vehicle or within reach while operating the vehicle. Confirm with your relevant authorities.
-  Incorrect use of this product can result in damage to the components associated parts and/or the vehicle, which is not covered under warranty.

Receiver

Controller

Program Button

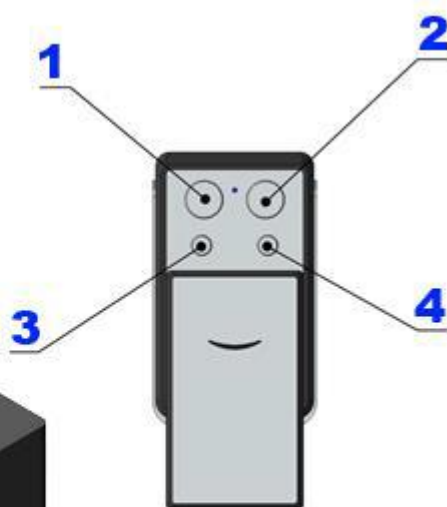

STEP 1- On the Receiver, connect 12volt power to Red and Yellow wires, connect Earth to Brown wire.

Note: If adding a new Controller to an existing installation disconnect the Receiver wires to the solenoid Valve Block or disconnect the Earth of the Solenoid Valve Block.

STEP 2- Press the **Program Button 1 time** and then hold down the **Controller Upper Left 1** button until the Receiver LED flashes 1 time and then release

STEP 3- Press the **Program Button 2 times** and then hold down the **Controller Upper Right 2** button until the Receiver LED flashes 2 times and then release

STEP 4- Press the **Program Button 3 times** and then hold down the **Controller Lower Left 3** button until the Receiver LED flashes 3 times and then release

STEP 5- Press the **Program Button 4 times** and then hold down the **Controller Lower Right 4** button until the Receiver LED flashes 4 times and then release

STEP 6- Test the correct Programming by pressing each button on the Controller and test for 12 volts at the corresponding wire of the Receiver. Reconnect any removed wires to their previous position.



FREECALL 1800 247 224